

*Full length research paper*

# **Sustainable housing provision: preference for the use of interlocking masonry in housing delivery in Nigeria**

**Y. M. D. Adedeji\* and G. Fa**

Department of Architecture, Federal University of Technology, Akure

Accepted 17 November, 2011

**This paper reports a study on the preference level for the use of interlocking masonry over the conventional types in sustainable housing delivery in Nigeria. Globally, buildings are the largest energy consumers and greenhouse gases emitters, consuming over 50% in some cases. Common materials used for masonry works in housing delivery in Nigeria such as sandcrete blocks and burnt bricks impact high energy and greenhouse gases on the environment due to the production processes involved. Intelligent choice of building materials capable of reducing energy used in buildings is imperative towards achieving materials efficiency and cost reduction. In this study, a comparative survey was carried out empirically among selected professionals in the building industry from 4 out the 6 geo-political zones in Nigeria through the use of questionnaire, direct observations, and interview schedules. Analyses of Chi-square test for significance of differences between materials price rating and acceptability of interlocking masonry as well as level of willingness of respondents to use the selected materials for future projects were conducted. Findings signify shorter time of construction and reduced cost of construction expended when interlocking blocks are used. The study concludes that interlocking masonry is a good replacement to the conventional types in construction of housing in Nigeria.**

**Keywords:** building materials, conventional blocks, housing provision, interlocking blocks, sustainable.

## **INTRODUCTION**

Building materials constitute the largest single input in housing construction. While Adedeji(2010) observed that about sixty (60) per cent of the total housing expenditure goes for the purchase of building materials, Arayela (2005) averred that the cost of building materials constitute about 65 percent of the construction cost. Ogunsemi (2010) opined that building materials form the main factors that restricts the supply of housing and ascertained that they account for between 50-60 percent of the cost of buildings. Thus, Adedeji (2002) rightly observed that one main barrier to the realisation of effective housing in Nigeria as revealed in successive government efforts has been the cost of housing in the

country. He argued that in the early periods, shelter in Nigeria was easily affordable as building materials were sourced from man's immediate environment at affordable costs. Technology also was readily available with commensurate simple techniques. But contact with the outside world through interregional and international training of professionals in foreign countries as occasioned by colonization, brought changes to tastes and hence outlook to house forms. These changes rendered the undeveloped local building materials inadequate while there was an increased demand for exotic ones. Accordingly, Arayela (2002) posited that the modern building industry lays much emphasis on sophisticated building materials and techniques that are expensive and energy consuming.

Though, housing delivery efforts have evidently been inhibited by prohibitive costs of building materials, this problem cannot be reasonably and reliably overcome by merely resorting to the use of locally available materials

\*Corresponding author Email: [myomi\\_adedeji2k@yahoo.com](mailto:myomi_adedeji2k@yahoo.com)

without due considerations to the applicable initiative, the cost of processing and sustainability of the local materials. One of the most important components of a sustainable building is the material efficiency. Correct selection of building materials can be performed by taking into account their complete life time (i.e. from cradle to grave) and by choosing products with the minimal environmental impacts. For instance, González and Navarro (2006) estimated that the selection of building materials with low environmental impacts can reduce carbon dioxide (CO<sub>2</sub>) emissions by up to 30%. The use of renewable and recycled sources is widely encouraged as the life-cycle of a building and its elements can be closed (Chwieduk, 2003). The other factors that greatly affect the selection of building materials are their costs and social requirements such as thermal comfort, good mechanical properties (strength and durability), aesthetic characteristics and an ability to construct quickly. Ideally, the combination of all environmental, economic and social factors can give a clear description of a material, and thus helps in a decision making process regarding the selection of the materials suitable for buildings (Abeyundara, *et al.*, 2009). It is along this line that the building industry in Nigeria is evolving varied kinds of building system adapted to the local materials, environmental conditions, city developments and levels of techniques of building construction that are in use. One of such system is the adaptation/ introduction of interlocking masonry into the building industry which forms the focus of this research.

### **Building Materials and Sustainable Housing Provision**

The process of housing development should be based on sustainability principles, which could be applied in the conception, construction and use of the buildings. The goals of the process are to decrease the environmental costs incurred by inadequate constructive systems and solutions, minimizing the impacts on natural resources, and improving users' comfort (Amado, *et al.*, 2007). Gilkinson & Sexton (2007) defined sustainable housing as a form of affordable housing that incorporates environmentally friendly and community-based practices. It attempts to reduce the negative impact that homes can have on the environment through choosing better building materials and environmental design. Sustainable housing provision requires proper definition of housing needs, and the participation of the end users to ensure their satisfaction. The general goal of sustainable development is to meet the essential needs of the world's poor while ensuring that future generations have an adequate resources base to meet theirs. It is thus geared towards meeting the needs of the present generation without

compromising the ability of future ones to meet their own needs (Adedeji, 2007). It further includes the production of materials, which must use resources and energy from renewable sources instead of non-renewable ones. Sustainable building materials are environmentally responsible because their impacts are considered over the complete life time of the products. Sustainable building materials should pose no or very minimal environmental and human health risks (Calkins, 2009). They should also satisfy the following criteria: rational use of natural resources; energy efficiency; elimination or reduction of generated waste; low toxicity; water conservation; affordability. Sustainable building materials can offer a set of specific benefits to the owner of a building such as reduced maintenance and replacement costs, energy conservation, improved occupant's health and productivity, lower costs associated with changing space configurations, and greater flexibility in design (www.GreenBuilding.com, 2009).

Achieving sustainability in housing provision requires major societal changes, restructuring of institutions and management approaches. It requires the appropriate political will based on the conviction of the responsibility of government to its citizens, and the need to create humane and decent environment for dignified living (Joseph, 2010). In order to realise sustainable housing provision the housing needs of the Nigerian population have to be put into proper focus, and a coordinated programme to achieve this should be thoroughly worked out. With due consideration given to the input of the local communities, government may initiate aided self-help programmes and low-cost core housing units. It can also facilitate the acquisition of building materials, the cost of which constitutes about 60% of the entire cost of a building. Production of building materials of indigenous origin by private investors should be given logistic and material support by government

### **Interlocking Blocks and Energy Efficiency**

Introduction of interlocking or "dry stack" mortarless masonry systems in masonry construction requires the development of efficient, easy to handle, and yet versatile blocks. Varied interlocking blocks developed for use include Sparlock system, Meccano system, Sparfil system, Haener system, and the Solid Interlocking blocks (SIB) or Hydraform blocks, which are an improvement over the traditional adobe bricks or unfired laterite blocks that were prevalent in the 20<sup>th</sup> century in some African countries (Anand & Ramamurthy (2003). Interlocking blocks can also be of cement and sand content only.

In Nigeria, the Nigerian Building and Road Research Institute (NBRRRI) developed an interlocking block making machine meant to produce SIB types. The blocks have

geometric size of 225 x 225 x 112 mm. This machine produces solid blocks of laterite composition mainly and stabilised with cement material of ratio 1:20 (Adedeji,

2007). The major environmental burdens associated with building materials (conventional and innovative types) include embodied energy of building materials and greenhouse emissions originated from each stage of their life-cycle. Embodied energy is defined as the amount of energy required to produce a material and supply it to the point of use. It is an important measure of the effectiveness of building materials in the environmental terms (Abeyundara, *et al.*, 2009). Embodied energy consists of: energy required for the manufacturing of building materials; energy associated with the transportation of raw materials to the factory and of the finished products to the consumer; energy needed for assembling various building materials to form a building. The results presented by Thormark (2006) indicate that embodied energy in traditional building can be reduced by approximately 10–15% through the proper selection of building materials with low environmental impacts. Although the values of embodied energy can vary widely (sometimes by as much as 100%, depending on the number of factors like country, manufacturing processes, recycling technologies, methodology of analysis, fuel costs and destination), they can be considered as reasonable indicators of an overall environmental impact of building materials (Venkatarama-Reddy and Jagadish, 2003). The usage of SIB in place of conventional fired ones can significantly reduce the energy use and also cut down CO<sub>2</sub> emissions. Interlocking blocks are manufactured by hydraulically compressing a soil and cement mixture (stabiliser) in a block-making machine (Figure 1).

The production process involves preparation of soil, preparation of mix, compression of mix, stacking and curing of blocks. The results of several studies [Harris, *et al.* 1992; Anand & Ramamurthy, 2000, 2003] showed that increase in durability and strength over conventional blocks and unfired blocks occurred when cement is added to stabilise solid interlocking blocks. In the production of the latter, a 4MPa block requires a 1:20 ratio of cement to soil for stabilisation. This means that for one bag of 50kg cement (+33 litres) you will need about 10 wheelbarrows (+65 litres/wheelbarrow) of soil. This mix yields about 75 blocks, with engineering standards acceptable for wall construction ([www.hydraform.com](http://www.hydraform.com))

In Solid interlocking blocks (see Figure 2), substantial cost savings can be achieved due to elimination of bedding mortar in the superstructure (except in ring beams and in high gables) accelerates construction, thereby reducing workmanship and cost. Hydraform blocks are three times as efficient as concrete and almost twice as efficient as fired clay bricks in terms of the

thermal insulation they offer ([www.hydraform.com](http://www.hydraform.com)). Attractive, face brick finishes (in a variety of natural colours derived from the soil found at individual sites) is also possible with the use of the material (Adedeji, 2011). However, Adedeji (2007) observed that block strength is affected by cement content quality, curing duration (7 days minimum) and soil type. Moreover, energy input of interlocking blocks are comparable to that of unfired clay bricks, which their total energy input was estimated of 657 MJ/ton as opposed to 4,187 MJ/ton for the common fired bricks, while an equivalent output of CO<sub>2</sub> emission was 41 kg CO<sub>2</sub>/ton compared to 202 kg CO<sub>2</sub>/ton for traditional bricks in mainstream construction (Oti *et al.*; [www.hydraform.com](http://www.hydraform.com)).

### Concrete and Cement Materials

Concrete and cement products are the most widely used for construction of foundations, structural frames, floors, roofs, and prefabricated elements in Nigeria and many parts of the globe (Pulselli, *et al.* 2008). Globally, more than 10 billion tons of concrete are produced annually (Meyer, 2009). Concrete is a durable material with excellent mechanical properties. It is adaptable to different climates, relatively fire resistant, widely available and affordable. Concrete can be moulded almost into any shape and can be designed to satisfy almost any performance requirements (Meyer, *ibid*). It can be reinforced with either steel or fibres. Moreover, recycled materials can be incorporated into the concrete mix, thus reducing consumption of raw materials and disposal of waste products. The use of admixtures-materials added to concrete-becomes very popular as the final composite can have better durability and gains some specific unique properties (Calkins, 2009). In spite of these advantages, concrete unfortunately has an enormous negative impact on the environment. It is estimated that cement and concrete industry generates up to 7% of global anthropogenic CO<sub>2</sub> emissions, and it is set to increase dramatically in the coming decades as the Earth's population grows (Calkins, 2009). Apart from the emissions related to the combustion of fossil fuels, there is a release of CO<sub>2</sub> associated with unavoidable decarbonation of limestone (raw material) (Damtoft, *et al.* 2008). Concrete manufacturing is responsible for generating not only carbon dioxide but also other air pollutants like carbon monoxide (CO), sulphur (IV) oxides (SO<sub>2</sub>), nitrogen (IV) oxides (NO<sub>2</sub>), hydrogen chloride (HCl), volatile hydrocarbons and particulate matter. Production of concrete causes depletion of non-renewable mineral and water resources required in extremely large quantities.

Concrete industry must, therefore, take urgent actions in order to reduce the emissions of CO<sub>2</sub> and other air



**Figure 1:** Hydraulic Machine developed by NBRRI, Lagos. Source: Field survey (2007).

pollutants; to reduce the use of energy; to cut down the use of natural resources (including water); and to minimize the amount of waste generated. One of the effective ways to deal with negative environmental impact of concrete is to reduce the total volume of this material needed for a certain construction process by enhancing its performance (Joseph, 2010).

### **Research Setting, Materials and Methods**

The research method was an abridged form of a parent research carried on materials preference options for sustainable low-income housing in selected cities in Nigeria. A multi-stage sampling technique was adopted in selecting the zones and the cities. The stages of the multi-stage sampling technique employed were; (i) adoption of the original six geo-political zones and random selection of 4 zones out of the six zones; (ii) random selection of one State per zone and (iii) specific selection of State capitals in the surveyed zones as they were adjudged to be the most urban. A town was randomly selected from each of the geopolitical zones as follows Abuja, (North-central zone); Port-Harcourt (South-south zone), Lagos (Southwest zone) and Enugu

(Southeast zone). Data were obtained through observations from case studies. Also, a well-structured questionnaire, which was designed to investigate 25 variables on housing materials, was used to elicit opinions of professionals and clients on the use of these materials. The variables were structured in question form and responses were required in pre-coded alternatives given. Research assistants, who had earlier been trained by the author, administered the questionnaire to selected professionals in the building industry. The selected professionals (Architects, Engineers, Quantity Surveyors and Builders) distributed over four out of the six geo-political zones in Nigeria expressed their opinion on the acceptability and willingness to use this material as a replacement for the conventional sandcrete blocks. Questionnaires were administered to two hundred respondents in the four geo-political zones as shown in Table 1.

Descriptive statistics such as frequency distributions and pie-chart were utilised for the analysis of socio-economic data while Chi-square ( $c^2$ ) was used to test bivariate relationships and determine the superiority of the selected materials in terms of cost-efficiency over the conventional type. The chi square model used is given as:



**Figure 2:** Stacking of Solid Interlocking blocks. Source: Field survey (2007)

$$c2 = \sum_{i=1}^n \frac{(O_i - E_i)^2}{E_i} \dots (3.1)$$

Where

- $O_1$  = observed frequency
- $E_1$  = expected frequency
- $n$  = number of category

## Results and Discussions

Observations from case studies on comparative cost of interlocking blocks with conventional types were obtained from the four (4) selected locations. Prices of interlocking blocks and conventional blocks were also obtained from the market. While conventional sandcrete blocks (225 x 225 x 450) sells at ₦120.00, interlocking block (225 x 112 x 225) mm sells at ₦25.00 as at March 2007. Taking into consideration that conventional blocks requires the use of mortar for the laying of the blocks and associated non-contributory activities that affects its cost and the net output, these activities together with the use of mortar are eliminated in the operation of interlocking blocks (Anand & Ramamurthy, 2003). Though four (4) units of interlocking blocks will combine to make a unit of the conventional block, the cost of 4 units of interlocking blocks is still lesser than that of a corresponding conventional masonry (see Figure 3). Interlocking blocks are designed and produced in varied sizes in such a way

that it does not require cutting into sizes during setting operations. This further reduces the time for setting operation and eliminates associated wastages.

The production of SIB does not require firing as in the case of burnt bricks nor expensive factory processes associated with cement products. Hence, energy consumption is reduced considerably. Besides, the cost of using interlocking blocks in construction is lower than that of conventional blocks as its operation does not require special skilled labour as it is in the case of conventional blocks. It was also observed that while a gang of 1mason + 1 labour could achieve a productive hours 6.5m<sup>2</sup>/h with interlocking masonry, a gang of 1mason + 1 labour could only achieve a productive hours 1.55m<sup>2</sup>/h with conventional masonry. This further corroborates an observation made by Anand & Ramamurthy (2003) and Adedeji (2008) on a study carried out on comparison of output from different types of masonry works, where a crew of one person, achieved the productivity of 4.1 m/h with the use of hollow-interlocking blocks.

The results obtained from the various zones were not significantly different from each other, implying that the locations of the selected projects did not significantly affect the willingness of respondents to use these materials. Consequently, respondents favoured the use of interlocking masonry in housing construction based on its shorter time of construction, reduced cost, high energy efficiency and high acceptability index as against the use of the conventional types.

**Table 1:** Distribution of Questionnaires Type 'A within the Study Area

S/No	Geopolitical zone	Town	No of Questionnaire	No of Responses
1	South West	Lagos	50	40
2	North	Abuja	50	32
3	South South	Port Harcourt	50	28
4	South East	Enugu	50	20
<b>Total</b>			<b>200</b>	<b>120</b>

Source: Field survey (2007)



**Figure 3:** Interlocking Masonry at the Finishing Stage of a Housing Project. Source: Field survey, 2007

### Respondents' willingness to use interlocking blocks


The tendency towards the preference for the use of both interlocking-blocks masonry was further studied when testing the opinions of respondents about the willingness to use these materials in Figure 4. Majority of the respondents (83.4%) were willing to use the products. Only 6.6% claimed that they were not willing to use this material for construction. Ten percent of the respondents were undecided on the choice of masonry they could use for house construction. The decision of this group may be affected positively toward the use of interlocking blocks as the material becomes more popular in the building market.

Most of the respondents showed preference for interlocking blocks (83.4%) because it is faster in

construction of walls, time-saving, uses reduced labour and it is cost-efficient. The degree of preference for the use of the material will increase as more innovations and confident level of users increases. Hence, the material is strongly recommended for use as an alternative to conventional building blocks.

### Chi-square test for significance of differences between materials price rating and acceptability of interlocking masonry

Chi-square model was used to test for association between the materials' price rating and acceptability of inter-locking masonry by the respondents. The respondents' opinions on materials price rating were

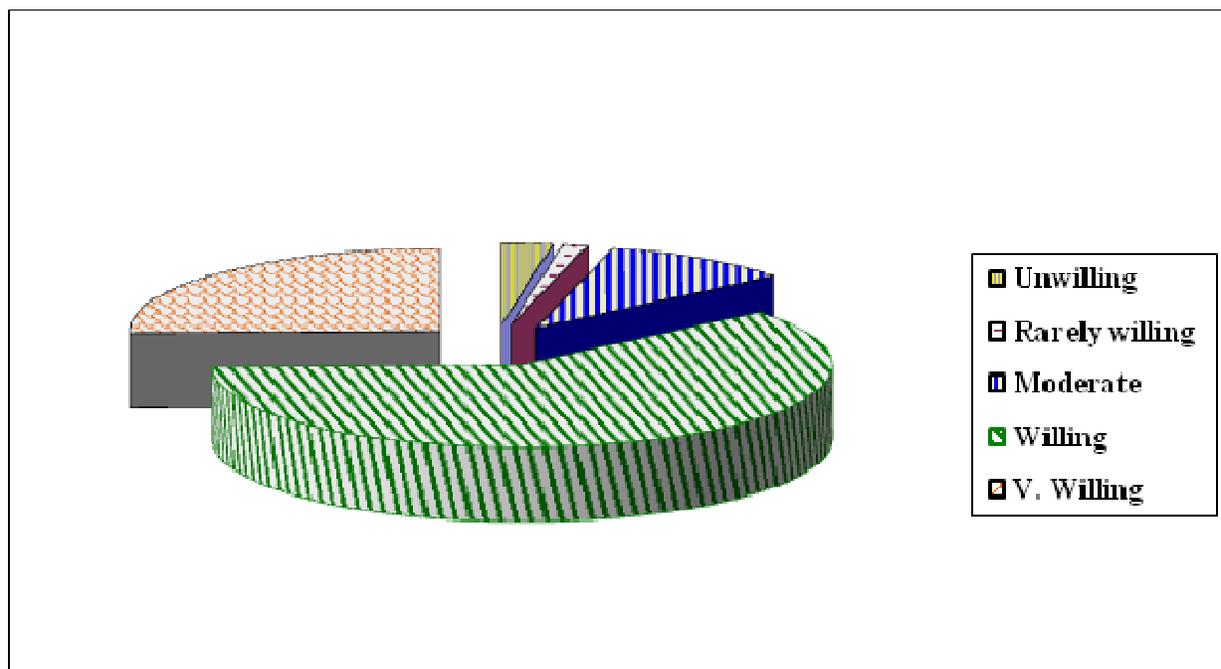

**Figure 4:** Willingness to use Interlocking blocks for housing projects. *Source: Field Survey, 2007*

**Table 2:** Measures of Association between Materials Price Rating and Acceptability of Interlocking Blocks

Cross tab			Acceptability of Interlocking Blocks					Total
			Not acceptable At all	Rarely acceptable	Moderately acceptable	Acceptable	Very Acceptable	
Materials Price Rating	Very Expensive	Observed	1	3	5	14	15	38
		Expected	1.0	7.9	6.3	14.6	8.2	38.0
	Expensive	Observed	1	12	7	25	5	50
		Expected	1.3	10.4	8.3	19.2	10.8	50.0
	Moderately Cheap	Observed	1	10	7	7	4	29
		Expected	0.7	6.0	4.8	11.1	6.3	29.0
	Cheap	Observed	0	0	0	0	1	1
		Expected	0	0.2	0.2	0.4	0.2	1.0
	Very Cheap	Observed	0	0	1	0	1	2
		Expected	0.1	0.4	0.3	0.8	0.4	2.0
	Total	Observed	3	25	20	46	26	120
		Expected	3.0	25.0	20.0	46.0	26.0	120.0

*Source: Researcher's field survey (2007), obtained from the four selected cities.*

found to depend on their acceptability of interlocking masonry.

Based on the result in Table 2, there is association between acceptability of interlocking masonry and price of materials. The c2 results shown in the table indicated a

significant level ( $P \leq 0.05$ ) for the variables used to assess acceptability and material price rating.

Since the c2 result showed a significant level of association between material price rating and acceptability of interlocking blocks irrespective of the cost

of the material in the locality, the material is therefore recommended for use as a better alternative to conventional blocks in housing delivery.

## CONCLUSION

This paper examines factors for the preference of interlocking masonry over the conventional type in construction of housing in Nigeria. Though the survey covered 4 out of 6 geo-political zones in Nigeria, the respondents' opinion on the variables investigated did not show significant differences from one location to the other but in the willingness of respondents to use interlocking masonry as a better alternative to conventional masonry. This is predicated on the cost-efficiency, shorter period of setting, and energy efficiency of the material. The field data obtained from four different locations were analysed which showed 83% respondents' preference for the use of interlocking masonry as against the use of the conventional type. The analysis of measure of association and their significance of interlocking-blocks masonry based on variables such as material price rating and acceptability / willingness indicated results of significance level at ( $P \leq 0.05$ ) of the association of variables measured. Besides, interlocking blocks offer several advantages such as design flexibility, cost effectiveness, reduced construction time, environmental friendly and solution to space shortage. Thus, the result of the research has provided information that could help to reduce cost of housing projects in order to make housing affordable and sustainable.

## REFERENCES

- Abeyundara UG, Babel S, Gheewala S (2009). A matrix in life cycle perspective for selecting sustainable materials for buildings in Sri Lanka. *Build. Environ.* 44: 997-1004.
- Adedeji YMD (2002). Achieving affordable housing in South-West Nigeria through Local building material. *J. Environ. Technol.* 1(2): 15-21,
- Adedeji YMD (2007). Materials preference options for sustainable low-income housing in selected cities in Nigeria. Unpublished PhD Thesis, submitted to The Federal University of Technology, Akure.
- Adedeji YMD (2008). Modelling dry masonry construction for sustainable low-income housing in Nigeria. *FUTAJEET-An Intl. J. Eng. Technol.* 6(1): 101-108
- Adedeji YMD (2010). Technology and standardised composite cement fibres for housing in Nigeria. *J. Niger. Inst. Archit.* 1: 19-24.
- Adedeji YMD (2011). Housing economy: use of interlocking masonry for low-cost housing in Nigeria. Proceedings of the Economy conference held between 6-8 July, 2011, Cardiff, Wales, UK.
- Amado MP, Pinto AJ, Santos CV (2007). The Sustainable Building Process, Proc. of XXXV IAHS World Congress on Housing Science, Melbourne, Australia, 4-7 September, CD ROM.
- Anand KB, Ramamurthy K (2000). Development and performance evaluation of interlocking block masonry. *J. Archit. Eng.* 6(2): 45-51.
- Anand KB, Ramamurthy K (2003). Development and performance evaluation of interlocking block masonry. *J. Archit. Eng.* 6(2): 45-51.
- Arayela O (2002). Increasing housing stock at reduced cost in Nigeria. *Association of Architectural Educators in Nigeria, AARCHES J*, 2 (2): 18-24.
- Arayela O. (2005). Laterite bricks: before now and hereafter. Inaugural lecture series 40 delivered at Federal University of Technology, Akure, 5-15.
- Calkins M (2009). *Materials for Sustainable Sites: A Complete Guide to the Evaluation, Selection, and Use of Sustainable Construction Materials*; Hoboken, NJ, USA: John Wiley & Sons.
- Chwieduk D (2003). Towards sustainable-energy buildings. *Appl. Energy*, 76: 211-217.
- Damtoft JS, Lukasik J, Herfort D, Sorrentio D, Gartner EM (2008). Sustainable development and climate change initiatives. *Cement Concrete Res.*, 38: 115-127.
- González MJ, Navarro JG (2006). Assessment of the decrease of CO<sub>2</sub> emissions in the construction field through the selection of materials: Practical case study of three houses of low environmental impact. *Build. Environ.* 41: 902-909
- Gilkinson N, Sexton M (2007). Delivering sustainable homes; meeting requirements: a research agenda; Proc. of XXXV IAHS World Congress on Housing Science, Melbourne, Australia, 4-7 September, CD ROM.
- Green Building Home Page (2009). Available online: <http://www.ciwmb.ca.gov/GreenBuilding/> (accessed on 1 October 2009).
- Harris HG, Oh KH, Hamid AA (1992). Development of new interlocking and mortarless block masonry units for efficient building system. Proceedings of 6th Masonry Symposium, Department of Civil Engineering, University of Saskatchewan, Saskatoon, Saskatchewan, Canada, 723-734.
- Joseph P (2010). Sustainable non-metallic building material. *Sustain. Rev* 2, [www.mdpi.com/journal/sustainability](http://www.mdpi.com/journal/sustainability)
- Meyer C (2009). The greening of the concrete industry. *Cement Concrete Compos.* 31: 601-605.
- Ogunsemi DR (2010). The use of enough quality and quantity materials for building a durable edifice. A Lecture delivered at Campus Transformation Network, Federal University of Technology, Akure
- Oti JE, Kinuthia JM, Bai J (2009). Engineering properties of unfired clay masonry bricks. *Eng. Geol.* 107: 130-139.
- Pulselli RM, Simoncini E, Ridolfi R, Bastianoni S (2008). Specific energy of cement and concrete: An energy-based appraisal of building materials and their transport. *Ecol. Indic.* 8: 647-656.
- Thormark C (2006). The effect of material choice on the total energy need and recycling potential of a building. *Build. Environ.* 41: 1019-1026.
- Venkatarama-Reddy BV, Jagadish KS (2003). Embodied energy of common and alternative building materials and technologies. *Energy. Bldg.* 35: 129-137.